



LED POWER SUPPLY DATASHEET

SNP60-24VFC

·DESCRIPTION

Super slim LED drivers, input with AC8 socket, output with 6 connectors, helpful for furniture, mirror and cabinet lighting. SELV. Open circuit, short circuit, overload and auto recovery. Class II, lifetime 30,000hrs.



·Input

Items	Conditions	Request	Note
Input voltage	Ta	AC200-240V	--
Input frequency		50/60Hz	--
Input current		<0.40A	--
Input power	25°C, rated input voltage, output with max. rated power	<70.5W	--
Efficiency		≥88.5%	--
Standby	25°C, rated input voltage, output without load	<0.5W	average
Inrush current	25°C, rated input voltage	<60A	peak
PF	25°C, rated input voltage, output max. rated power	≥0.90	--

·Temperate and others

Item	Conditions	Request	Note
Operation temp.	--	-20-45°C	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	90°C	--
Lifetime	Max.Ta,rated input voltage,output with max.rated power	30,000hr	--
Working noise	25°C, rated input voltage, output with rated power, mute box background noise<35dB, pickup 10cm distance from products	yes	--

·Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	yes	--
Over load	Ta ,0.94-1.06 times of input voltage, 1.25 times of rated power	yes	--
Short circuit	Ta ,0.94-1.06 times of input voltage	yes	--
Over temperature	Ta ,0.94-1.06 times of input voltage, temperature detected point more than 115 degree	yes	--
Over voltage	Ta ,0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit recovation	yes	--
Latch off	Over heat re-start after cut off	yes	--

·Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage, output with max. rated power	<0.5S	--
Output voltage and precision	Ta, rated input voltage, output with rated power	24V±5%	--
Output current range	Ta ,rated input voltage	0-2.5A	
Output voltage wave	25°C, rated input voltage, output with max. rated power	240mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta , rated input voltage, output with rated power	--	--
Rated output voltage range	Ta , rated input voltage,	--	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

·Mechanical, mounting


Items	Conditions
Case material and size	Plastic
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	AC8 socket
Output cables dimension	connector
Output cables length	--

·Standard

Items	Conditions
Safety	IEC61347-1、IEC61347-2-13
Harmonic	IEC61000-3-2 class C
EMI	IEC55015
EMS	EN61000-4-2,3,4,5,6 EN61547

Dimensions(mm)

SNAPPY
KNOW HOW. NO LIMITS.

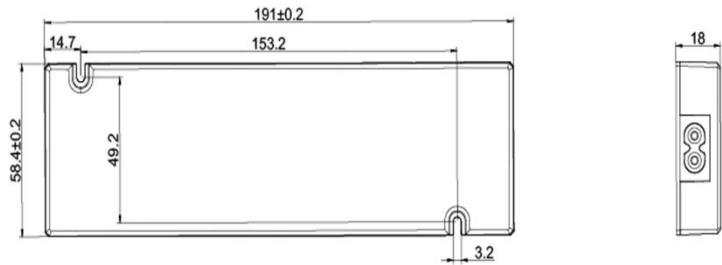

Wiring Diagram

