

Specification

D8120-24V-8mm

(9.6W)



▼ General description

- Self-encapsulated design offers eight optional 1900-6000K white lights
- High quality PFC, high thermal 3M adhesive
- With life span over 60000H
- Ta: -25~40°C ; Tc : 75°C (max)



▼ Dimension

※Max.length : 5000mm

Cutting unit : 6leds/50mm(1.97")




LED pitch : 8.33mm(0.33")

Min. bend diameter : Φ60mm

Mounting : 3M tape

IP : IP20/IP55/IP65/IP67/IP68

※Warranty : 5years

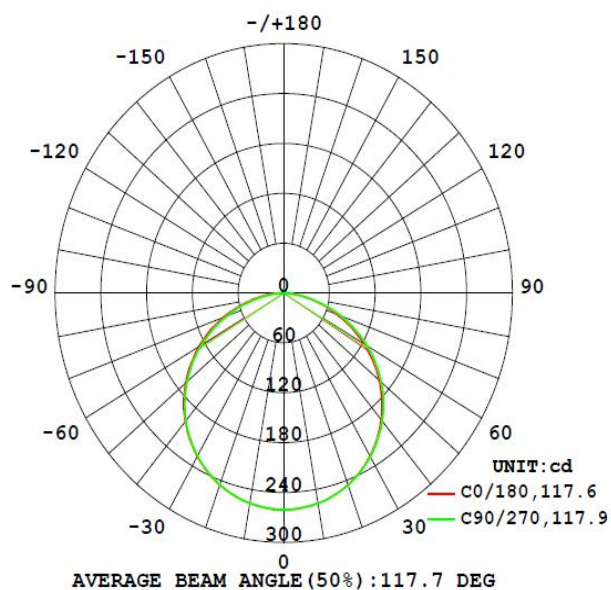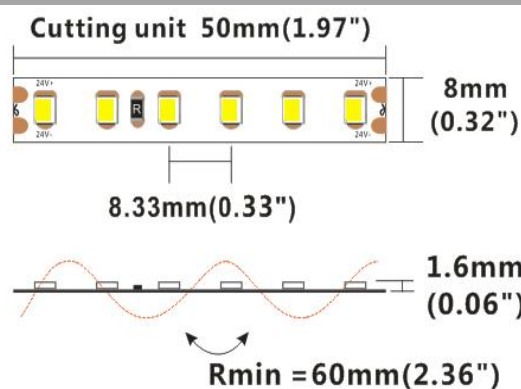

Photometric of 1M strip

Height	Eavg, Emax	Angle: 117.57deg	Diameter
1m	69.00, 260.51x		330.04cm
2m	17.25, 65.111x		660.07cm
3m	7.667, 28.941x		990.11cm
4m	4.313, 16.281x		1320.14cm
5m	2.760, 10.421x		1650.18cm
6m	1.917, 7.2351x		1980.22cm
7m	1.408, 5.3161x		2310.25cm
8m	1.078, 4.0701x		2640.29cm
9m	0.8519, 3.2161x		2970.33cm
10m	0.6900, 2.6051x		3300.36cm

AAI Figure

※Max.length data is based on 10% voltage drop

※Warranty is based on indoor use

▼ Electronic & output data

Input voltage : DC24V

Rated current : 0.35A(1m) /1.4A(5m)

Typical Power : 8.4W(1m) /33.6W(5m)

CRI : 90

Max.power : 9.6W/m

On-off times : 10000 (test times)

Power range : 7.5 ~ 9.6W

Copper foil : 3oz

CRI	Color/wave	CCT	Lumen(lm)	lm/W	Energy efficiency class
Ra>90	SW	2700K	748	89	G
Ra>90	WW	3000K	790	94	G
Ra>90	PW	3500K	798	95	G
Ra>90	NW	4000K	823	98	G
Ra>90	DW	5000K	823	98	G
Ra>90	W	6000K	790	94	G
0	R (attn to below point 5)	625nm	210	25	/
0	G	525nm	755	90	/
0	B	470nm	170	20	/

1.The tolerance of output data can be vary up to 15%


2.the output data tested according to IES TM-30-15

3.the output data is based on IP20/1merter , data of 5m in only for reference


4.IP protection process leads changes to size, CCT and luminous flux

5.The "24V+" marking on PCB will be "negative pole", and " 24V-" will be "positive pole" when LED strip in RED color.

▼ BIN

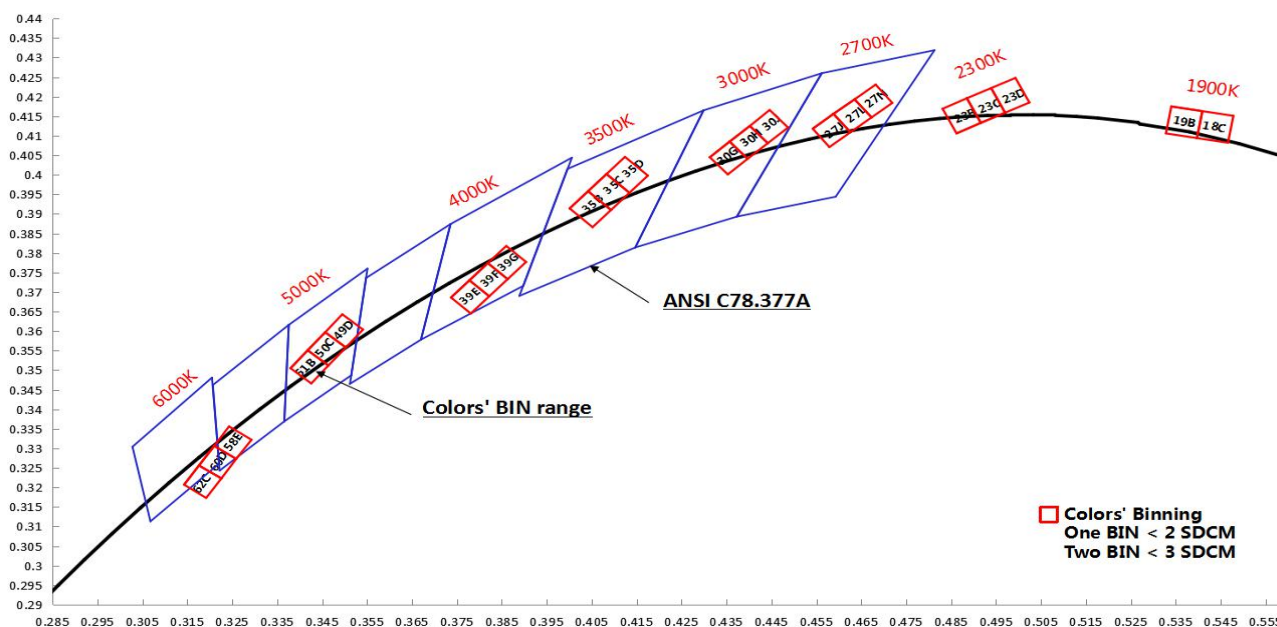

▼IP Process

IP Process	Picture	description	Size	optional CCT/color for finished product	lumen output rate
NO	 NO/IP20	No proof	8mm*1.5mm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K/R/G /B	100%
NA	 NANO/IP65	Nano-proof	8mm*1.5mm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K/R/G /B	98%
SG	 SG/IP55	Gel coating	8mm*2.7mm	2300K/3000K/3500K/4000K/ 6000K/10000K/15000K/R/G/B	90%
ET	 ET/IP67	Extrusion tube	10mm*4.8mm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K/R/G /B	88%
EF	 EF/IP68	Extrusion filling	10mm*5mm	2300K/2900K/3400K/3850K/ 5800K/8750K/15000K/R/G/B	86%

▼Accessories Information

Name	Picture	Code	description
Connector for wire and FPC		94-42-620800001	8mm width, 2PIN connector of wire and FPC,suitable for white color strip, NO/NA,2PIN wire18- 22AWG
Connector for FPC and FPC		94-42-620800002	8mm width, 2PIN connector of FPC and FPC,suitable for white color strip,NO/NA
Connector for wire and FPC		94-03-00-0044	8mm width, 2PIN connector of wire and FPC,suitable for white color and gel coating strip,SG,2PIN wire18- 22AWG
Connector for FPC and FPC		94-03-00-0048	8mm width, 2PIN connector of FPC and FPC,suitable for white color and gel coating strip,SG
Slim connector		94-03-00-0065	TSC-08-2, suitable for 8mm fpc to fpc connection , IP20, 2pin, 10pcs per bag
FPC with wire		94-03-00-0066	wire connection when using together with TSC-08-2,IP20,2PIN, 10PCS per bag
Fixed Clip		94-02-00-0002	Silicone clip, screw: PA 3*8mm, suitable for 8mm FPC,EH/EF/ET strip
Fixed Clip		94-02-00-0017	Fixed clip, transparent, 3*8mm self-tapping screws, suitable for 8mm FPC,NO/NA LED strip
Fixed Clip		94-02-00-0015	Fixed clip, transparent, 3*8mm self-tapping screws,suitable for 8mm FPC,SG LED strip


Silicone end cap set		94-02-00-0021	including end cap and plug,suitable for 8mm FPC,EH/ET/EF silicone extrusion strip
Mounting groove		94-02-00-0024	Transparent PVC mounting groove,suitable for 8mm FPC,silicone extruded EF/ET strip
Stopper glue		94-16-03010001	Silicone gel,suitable for ST/ET/EH/EF/SF waterproof LED strip

▼ Order Code Formats


1 : Category		2 : LED		3 : LED/m		4 : Voltage		5:FPC Width		6 : IP Process		7 : CRI		8 : CCT	
D	-	8	2835	120	120 LED	24	24V	08	8mm	NO	NO	9	> 90	GW	1900K
										NA	NANO			LW	2300K
										SG	Gel coating			SW	2700K
										ET	Extrusion tube			WW	3000K
										EF	Extrusion filling			PW	3500K
														NW	4000K
														DW	5000K
														W	6000K
														R	625nm
														G	525nm
														B	470nm
D	-	8		120		24		08		NO		9		GW	
9 : Silk Printing		10 : Entery cable		11 : Wire type		12 : Wire length		13 : Tape type		14 : Label Type		15 : Strip Length			
N	Neutral	S	Single	A	red and black cable	012	12cm	W	White 3M	C	COLORS	0500	5m		
C	COLORS	D	Doubel	B	SM-male wire	020	20cm	Y	Yellow 3M	S	Customized	5000	50m		
S	Customized	X	Nothing	C	SM-female wire	050	50cm	R	Red tape			4000	40m		
				X	Nothing	100	100cm	X	Nothing						
						0	Nothing								
N		S		A		012		W		C		0500			
D81202408NO-9GWNSA012WC0500															

▼ Packing

Colors brand package

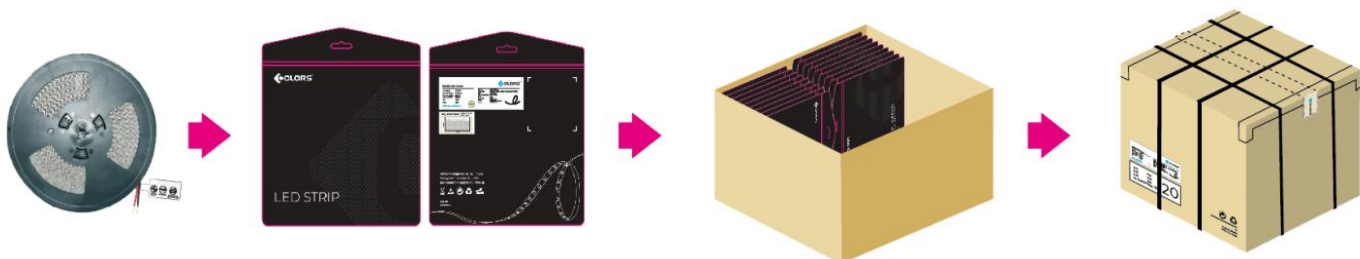

General customized package

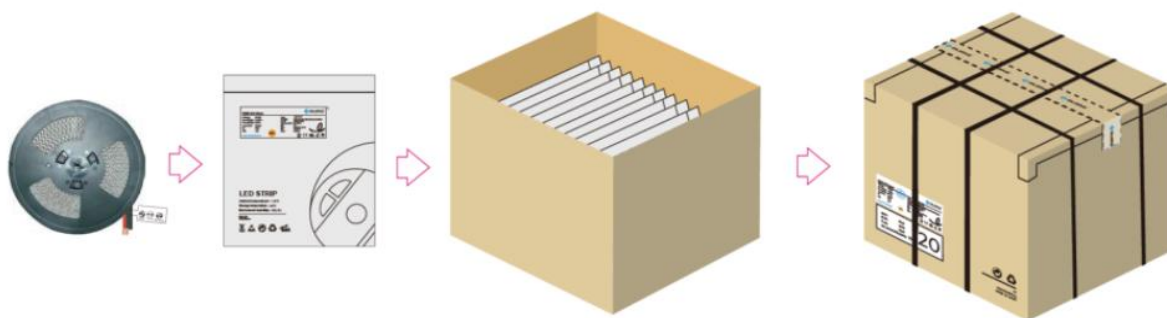


IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box (kg)	Gross weight (kg)	Package size (cm)
NO	5000*8*1.5	5	300	0.115	6.9	7.935	41*41*26
NA	5000*8*1.6	5	300	0.118	7.04	8.142	41*41*26
SG	5000*8*2.8	5	300	0.203	12.18	14.007	41*41*26
ET	5000*10*4.8	5	200	0.44	17.6	20.24	41*41*26
EF	5000*10*5	5	200	0.486	19.44	22.36	41*41*26

Remark : data with 10% tolerance


Engineering packaging of ET(IP67)/EF(IP67)

(free-soldering end caps with 40 cover per box could be ordered separately if needed)

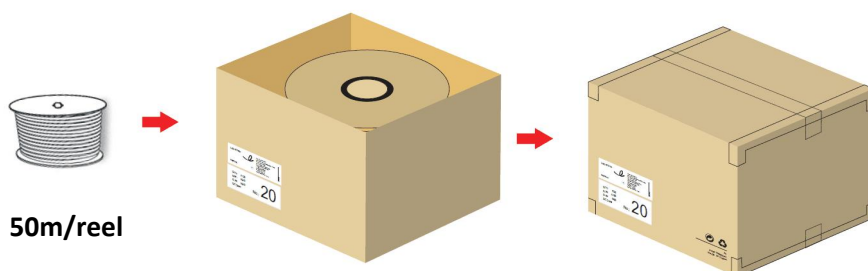

50m/reel

Engineering packaging of NO(IP20)/NA(IP65).

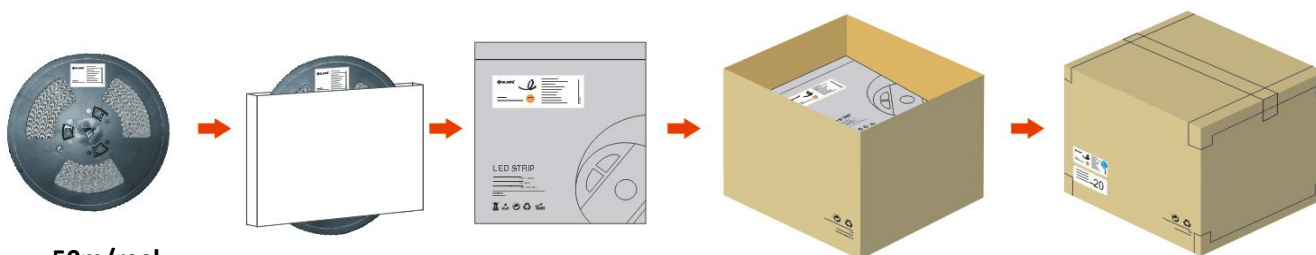

50m/reel

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box (kg)	Gross weight (kg)	Package size (cm)
NO	50000*8*1.5	50	650	1.15	14.95	17.193	41*41*26
NA	50000*8*1.6	50	650	1.18	15.34	17.641	41*41*26
ET	50000*10*4.8	50	100	4.48	8.96	10.304	25.5*25.5*26
EF	50000*10*5	50	100	4.95	9.9	11.385	25.5*25.5*26

Remark : data with 10% tolerance

▼Precautions

- ※ Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- ※ Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- ※ Do not fold it in case any damage of LED beads.
- ※ Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- ※ Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- ※ LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25°C~40°C.Storage temperature: 0°C~60°C.Please use the strips without waterproof within indoor environment with humidity less than 70%.
- ※ Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- ※ Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- ※ Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).