

LED POWER SUPPLY DATASHEET

SNP60-12VFP-1

DESCRIPTION

Linear type LED drivers,SELV,Open circuit, short circuit,overload and over temperature protection,Compliance to ERP directive,lifetime 30,000hrs.



Input

Items	Conditions	Request	Note
Input voltage	Ta	AC200-240V	--
Input frequency		50/60Hz	--
Input current	25℃,rated input voltage, output with max. rated power	<0.5A	--
Input power		<75W	--
Efficiency		≥88%	Typical
Standby		25℃,rated input voltage, output without load	average
Inrush current	25℃,rated input voltage	<75A	peak
PF	25℃,rated input voltage, output max. rated power	≥0.90	--

Temperate and others

Item	Conditions	Request	Note
Operation temp.	--	-20-45℃	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	80℃	<90℃
Lifetime	Max.Ta,rated input voltage,output with max.rated power	30,000hr	--
Working noise	25℃,rated input voltage,output with rated power ,mute box background noise<35dB,pickup 10cm distance from products	<35dB	--

Protection

Items	Conditions	Request	Note
Open circuit	Ta ,rated input voltage, no load	--	--
Over load	Ta ,0.94-1.06 times of input voltage, 1.2 times of rated power	yes	--
Short circuit	Ta ,0.94-1.06 times of input voltage	yes	--
Over temperature	Ta ,0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	--	--
Over voltage	Ta ,0.94-1.06 times of input voltage,output voltage is 1.5 times of rated one	--	--
Auto recovery	Over load, short circuit revocation	yes	--
Latch off	Over voltage, over heat re-start after cut off	--	--

Output

Items	Conditions	Request	Note
Startup time	25℃ , rated input voltage,output with max. rated power	<0.5s	--
Output voltage and precision	Ta T , rated input voltage, output with rated power	12V±5%	--
Output current range	Ta T ,rated input voltage	--	--
Output voltage wave	25℃ , rated input voltage,output with max. rated power	<500mV	Vp-p
Output overload	25℃,rated input voltage,output with 2 times LED load	--	--
Output current and precision	Ta , rated input voltage, output with rated power	--	--
Rated output voltage range	Ta , rated input voltage,	--	--
Output current wave	25℃ , rated input voltage,output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

Mechanical, mounting

Items	Conditions
Case material and size	Plastic
Mounting ways	Independent
Insulation type	Class II
IP grade	IP66
Input cables dimension	
Output cables dimension	
Output cables length	2000mm

Standard


Items	Conditions
Safety	IEC61347-1、IEC61347-2-13
Harmonic	IEC61000-3-2
EMI	IEC55015
EMS	IEC61547

Dimensions(mm)



Waterproof LED Power Supply

SNP60-VFP-1

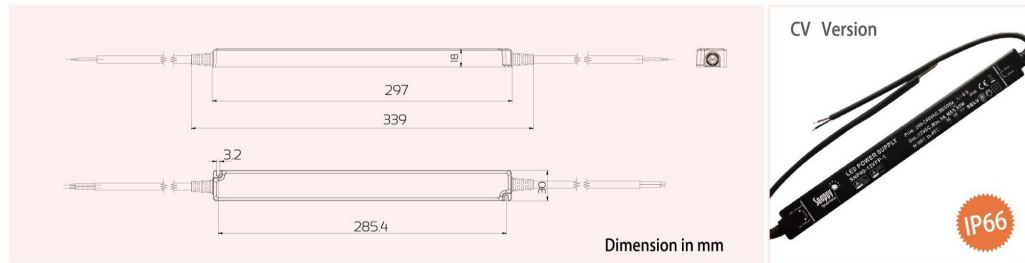

Characteristics

Rated input voltage: AC200-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
SNP60-12VFP-1	12V	0-60W	5A	≥ 0.9	45℃	80℃	285X30X18
SNP60-24VFP-1	24V	0-60W	2.5A	≥ 0.9	45℃	80℃	285X30X18

Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50/60Hz
- Output Power:60W
- Dimension:L285xW30xH18mm
- Body:PC Body By Waterproof Grade IP66
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection
- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012

