

Specification

D8168-24V-10mm



▼ General description

- Self-encapsulated design offers eight optional 1900-6000K white lights
- High quality PFC, high thermal 3M adhesive
- With life span over 60000H
- Ta: -25~40°C; Tc: 75°C (max)



▼ Dimension

※Max.length: 5000mm

Cutting unit: 7leds/42mm



LED pitch: 5.95mm

Min. bend diameter: Φ60mm

Mounting: 3M tape

IP: IP20/IP55/IP65/IP67/IP68

※Warranty: 5years

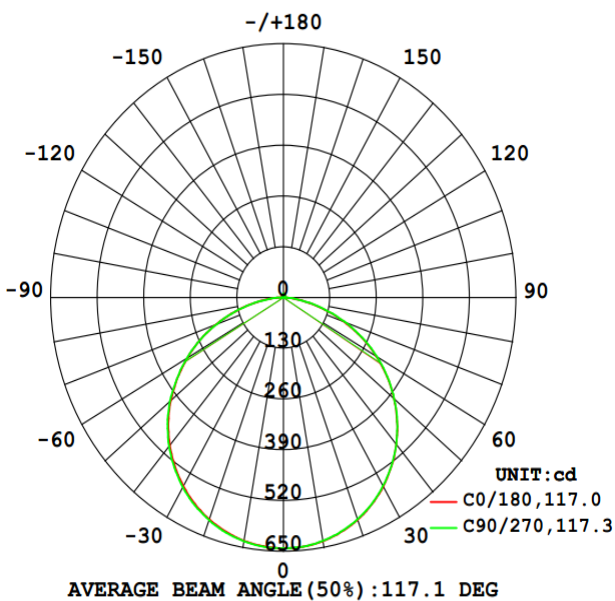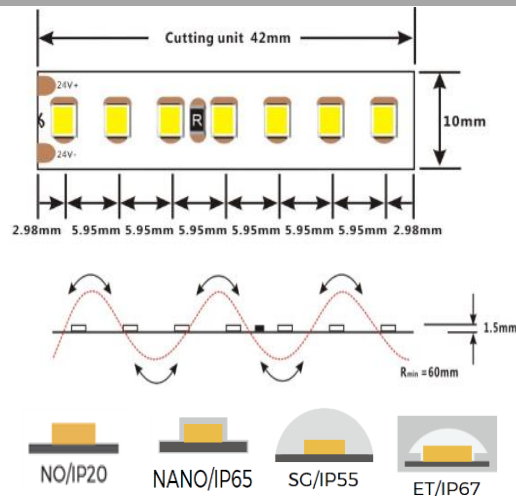

Photometric of 1M strip

Flux out: 1478 lm

Height	Eavg, Emax	Angle: 117.00deg	Diameter
1m	169.9, 643.11x		326.36cm
2m	42.47, 160.81x		652.72cm
3m	18.88, 71.461x		979.09cm
4m	10.62, 40.201x		1305.45cm
5m	6.795, 25.731x		1631.81cm
6m	4.719, 17.871x		1958.17cm
7m	3.467, 13.131x		2284.54cm
8m	2.654, 10.051x		2610.90cm
9m	2.097, 7.9401x		2937.26cm
10m	1.699, 6.4311x		3263.62cm

AAI Figure

※Max.length data is based on 10% voltage drop

※Warranty is based on indoor use

▼ Electronic & output data


Input voltage: DC24V
 Typical Powe: 16.2W(1m) /66.9W(5m)
 Max.power: 17.3W
 Power range: 15.0 ~ 17.3W

Rated current: 0.675A(1m) /2.79A(5m)
 CRI: >90/95/98
 On-off times: 10000 (test times)
 Copper foil: 3oz






CRI	Color	CCT	Lumen(lm)	lm/W	Energy efficiency class
Ra>90	SW	2700K	1700	105	F
Ra>90	WW	3000K	1810	112	F
Ra>90	PW	3500K	1860	115	F
Ra>90	NW	4000K	1920	119	F
Ra>90	DW	5000K	1920	119	F
Ra>90	W	6000K	1810	112	F
0	G	525~530nm	/	/	/
0	B	465~470nm	/	/	/

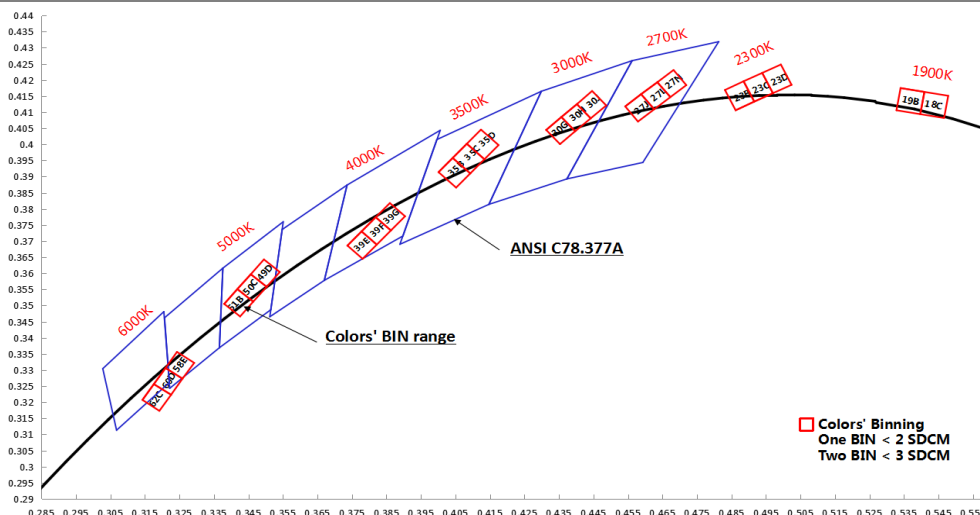- 1.The tolerance of output data can be vary up to 15%
- 2.the output data tested according to IES TM-30-15
- 3.the output data is based on IP20/1merter, data of 5m in only for reference
- 4.IP protection process leads changes to size, CCT and luminous flux








▼ BIN








▼ IP Process

IP Process	Picture	description	Size	optional CCT/color for finished product	lumen output rate
NO		No proof	10mm*1.5mm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K/G/B	100%
NA		Nano-proof	10mm*1.5mm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K/G/B	98%
SG		Gel coating	10mm*2.7mm	2300K/3000K/3500K/4000K/ 6000K/10000K/15000K/G/B	90%
ET		Extrusion tube	12mm*4.8mm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K/G/B	88%
EF		Extrusion filling	12mm*5mm	2300K/2900K/3400K/3850K/ 5800K/8750K/15000K/G/B	86%

▼ Accessories Information

Name	Picture	Code	description
Connector for wire and FPC		94-03-00-0037	10mm width, 2PIN connector of wire and FPC,suitable for white color strip, NO/NA,2PIN wire18- 22AWG
Connector for FPC and FPC		94-42-621020004	10mm width, 2PIN connector of FPC and FPC,suitable for white color strip,NO/NA
Connector for wire and FPC		94-03-00-0045	10mm width, 2PIN connector of wire and FPC,suitable for white color and gel coating strip,SG, 2PIN wire 18- 22AWG
Connector for FPC and FPC		94-03-00-0049	10mm width, 2PIN connector of FPC and FPC,suitable for white color and gel coating strip, SG
Slim connector		94-03-00-0064	TSC-10-2, suitable for 10mm fpc to fpc connection , IP20, 2pin, 10pcs per bag
FPC with wire		94-03-00-0067	wire connection when using together with TSC-10-2,IP20,2PIN, 10PCS per bag
Fixed Clip		94-02-00-0003	Silicone clip, screw: PA 3*8mm, suitable for 10mm FPC,EH/EF/ET strip

Fixed Clip		94-02-00-0018	transparent, 3*8mm self-tapping screws, suitable for 10mm FPC, NO/NA LED strip
Fixed Clip		94-02-00-0016	Fixed clip, transparent, 3*8mm self-tapping screws, suitable for 10mm FPC, SG LED strip
Silicone end cap set		94-02-00-0022	Silicone end cap set, including end cap and plug, suitable for 10mm FPC,EH/ET/EF silicone extrusion strip
Mounting groove		94-02-00-0025	Transparent PVC mounting groove,suitable for 10mm FPC,silicone extruded EF/ET strip
Stopper glue		94-16-03010001	Silicone gel, suitable for ST/ET/EH/EF/SF waterproof LED strip

▼ Order Code Formats


1: Category		2: LED		3: LED/m		4: Voltage		5:FPC Width		6: IP Process		7: CRI		8: CCT	
D	-	8	2835	168	168 LED	24	24V	10	10mm	NO	NO	9	> 90	GW	1900K
										NA	NANO	H	>95	LW	2300K
										SG	Gel coating	F	> 98	SW	2700K
										ET	Extrusion tube	0	0	WW	3000K
										EF	Extrusion filling			PW	3500K
														NW	4000K
														DW	5000K
														W	6000K
														G	Green
														B	Blue
D	-	8		168		24		10		NO		9		GW	

9: Silk Printing		10: Entry cable		11: Wire type		12: Wire length		13: Tape type		14: Label Type		15: Strip Length	
N	Neutral	S	Single	A	red and black cable	012	12cm	W	White 3M	C	COLORS	0500	5m
C	COLORS	D	Doubel	B	SM-male wire	020	20cm	Y	Yellow 3M	S	Customized	5000	50m
S	Customized	X	Nothing	C	SM-female wire	050	50cm	R	Red tape			4000	40m
				X	Nothing	100	100cm	X	Nothing				
						0	Nothing						
N		S		A		012		W		C		0500	


D81682410NO-9GWNSA012WC0500

▼ Packing

Colors brand package

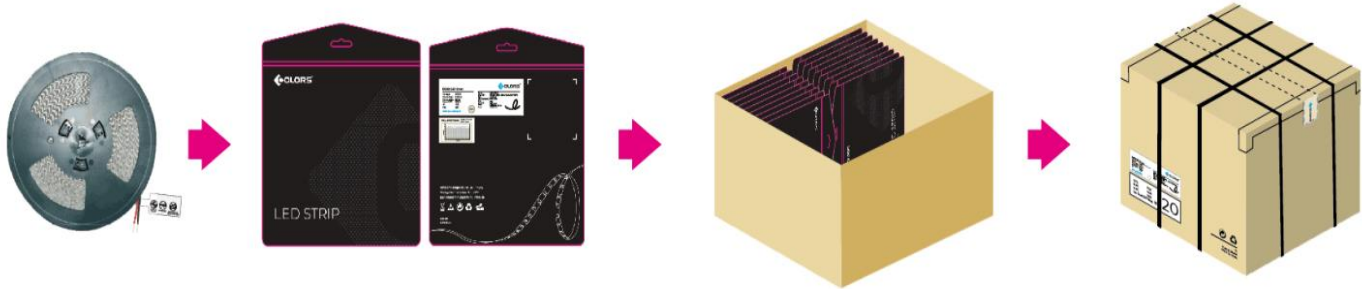

General customized package

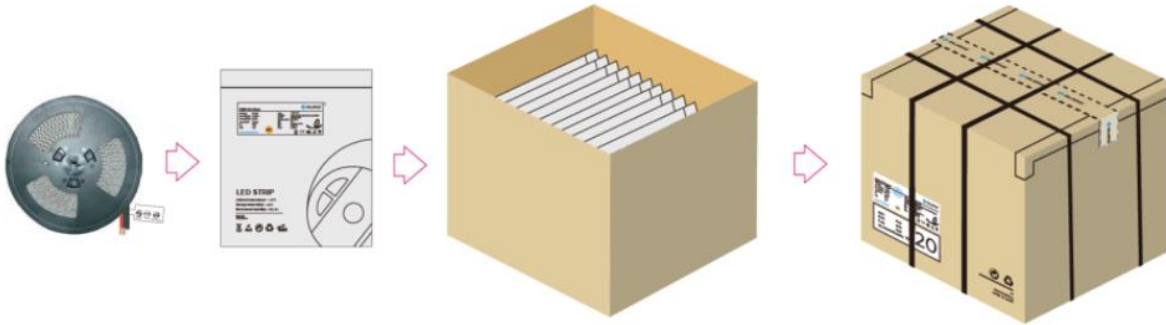


IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box (kg)	Gross weight (kg)	Package size (cm)
NO	5000*10*1.5	5	250	0.14	7	8.05	41*41*26
NA	5000*10*1.5	5	250	0.144	7.2	8.28	41*41*26
SG	5000*10*2.7	5	250	0.231	11.55	13.283	41*41*26
ET	5000*12*4.8	5	200	0.49	19.6	22.54	41*41*26
EF	5000*12*5	5	200	0.557	22.28	25.622	41*41*26


Remark: data with 10% tolerance

Engineering packaging of ET(IP67)/EF(IP67)

(free-soldering end caps with 40 cover per box could be ordered separately if needed)

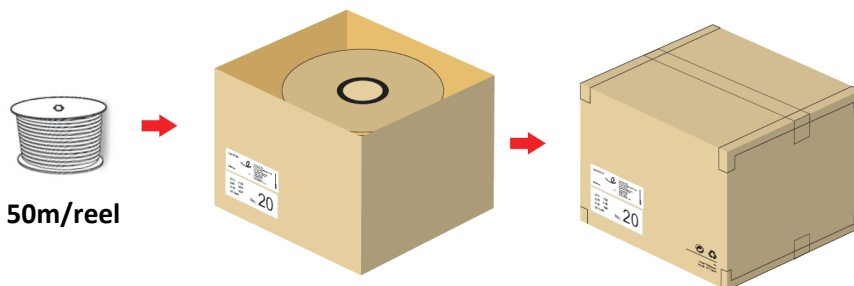

Engineering packaging of NO(IP20)/NA(IP65).

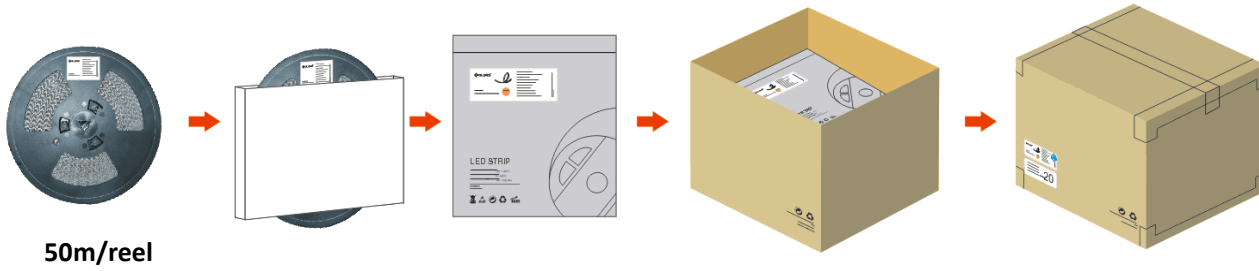

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box (kg)	Gross weight (kg)	Package size (cm)
NO	50000*10*1.5	50	500	1.4	14	16.1	41*41*26
NA	50000*10*1.5	50	500	1.44	14.4	16.56	41*41*26
ET	50000*12*4.8	50	100	4.99	9.98	11.47	25.5*25.5*26
EF	50000*12*5	50	100	5.68	11.36	13.064	25.5*25.5*26

Remark: data with 10% tolerance

▼Precautions

- ※ Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- ※ Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- ※ Do not fold it in case any damage of LED beads.
- ※ Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- ※ Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- ※ LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25°C~40°C.Storage temperature: 0°C~60°C.Please use the strips without waterproof within indoor environment with humidity less than 70%.
- ※ Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- ※ Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- ※ Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).