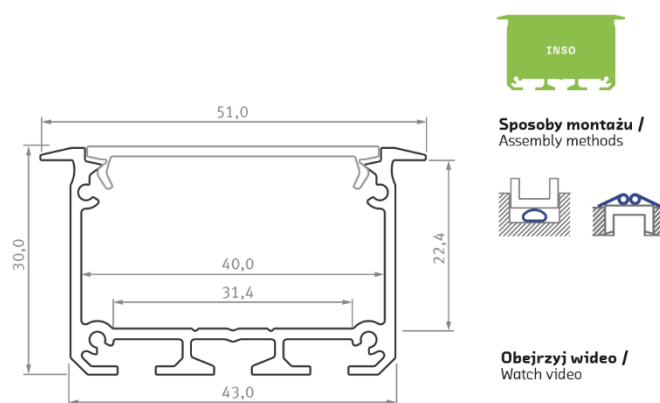




LPINSO






Profile LED / LED-Profil

Dimensions / Abmessungen (mm): 1000, 2020, 3000

Prolife colors Profil Farben	white (lacquered) Weiß (lackiert)	black (lacquered) Schwarz (lackiert)	silver (anodized) Silber (eloxiert)
			
1,0 m	10-0121-10	10-0125-10	10-0124-10
2,02 m	10-0121-20	10-0125-20	10-0124-20
3,0 m	10-0121-30	10-0125-30	10-0124-30
LED strip width (mm) LED-Bandbreite (mm)	3 × 10		

Covers / Abdeckungen

Dimensions / Abmessungen (mm): 1000, 2020, 3000

TRANSPARENTNY transparent	MROŻONY frozen	MLECZNY milky	FROSTED MLECZNY milky frosted	TRANSPARENTNY transparent	SREBRNY silver
WIDE				PRISMATIC PC	RASTER WIDE
					
1 m/PMMA 11-2033-10 1 m/PC 11-3033-10	1 m/PMMA 11-2032-10 1 m/PC 11-3032-10	1 m/PMMA 11-2031-10 1 m/PC 11-3031-10	1 m/PMMA 11-2036-10	1 m/PC 11-3034-10	1 m/ 14-7068-00


End caps (aluminum and plastic) Endkappen (Aluminium und Kunststoff)

with a hole / mit Öffnung			without a hole ohne Öffnung		
White / Weiß	Black / Schwarz	Silver / Gray / Silber / Grau	White / Weiß	Black / Schwarz	Silver / Silber

Maximum dissipated power of LED light sources Maximale Verlustleistung der LED-Lichtquellen

					
			ABS 12-0121-01		ABS lacq. 12-0125-01 ABS 12-0124-01

Accessoires / Zubehör

Straight connector / Gerader Verbinder  14-3032-02	Angular connector / Winkelverbinder  14-3030-01	Angular transverse connector / Winkel- Querverbinder  14-3038-01	Angular connector 120° / Winkelverbinder 120°  14-3036-01		
Mounting profile / Montageprofil  *S 1 m/10-0134-10			Mounting springs / Montagefedern  14-5001-00		
* S SREBRNY silver; * B CZARNY black; * W BIAŁY white					
 ALU 12-0000-12	 ALU 12-0000-78	 ALU 12-0000-13	 ALU 12-0121-11	 ALU 12-0122-11	 ALU 12-0125-11

for temperature
profile 55° C
Temperatur für
Profil 55°C

61,5 W

for temperature
profile 65° C
Temperatur für
Profil 65°C

84 W